


Greyter HOME:
Slab on Grade with DWHR (min 9' ceiling), Greywater tied into 3" Waste Stack

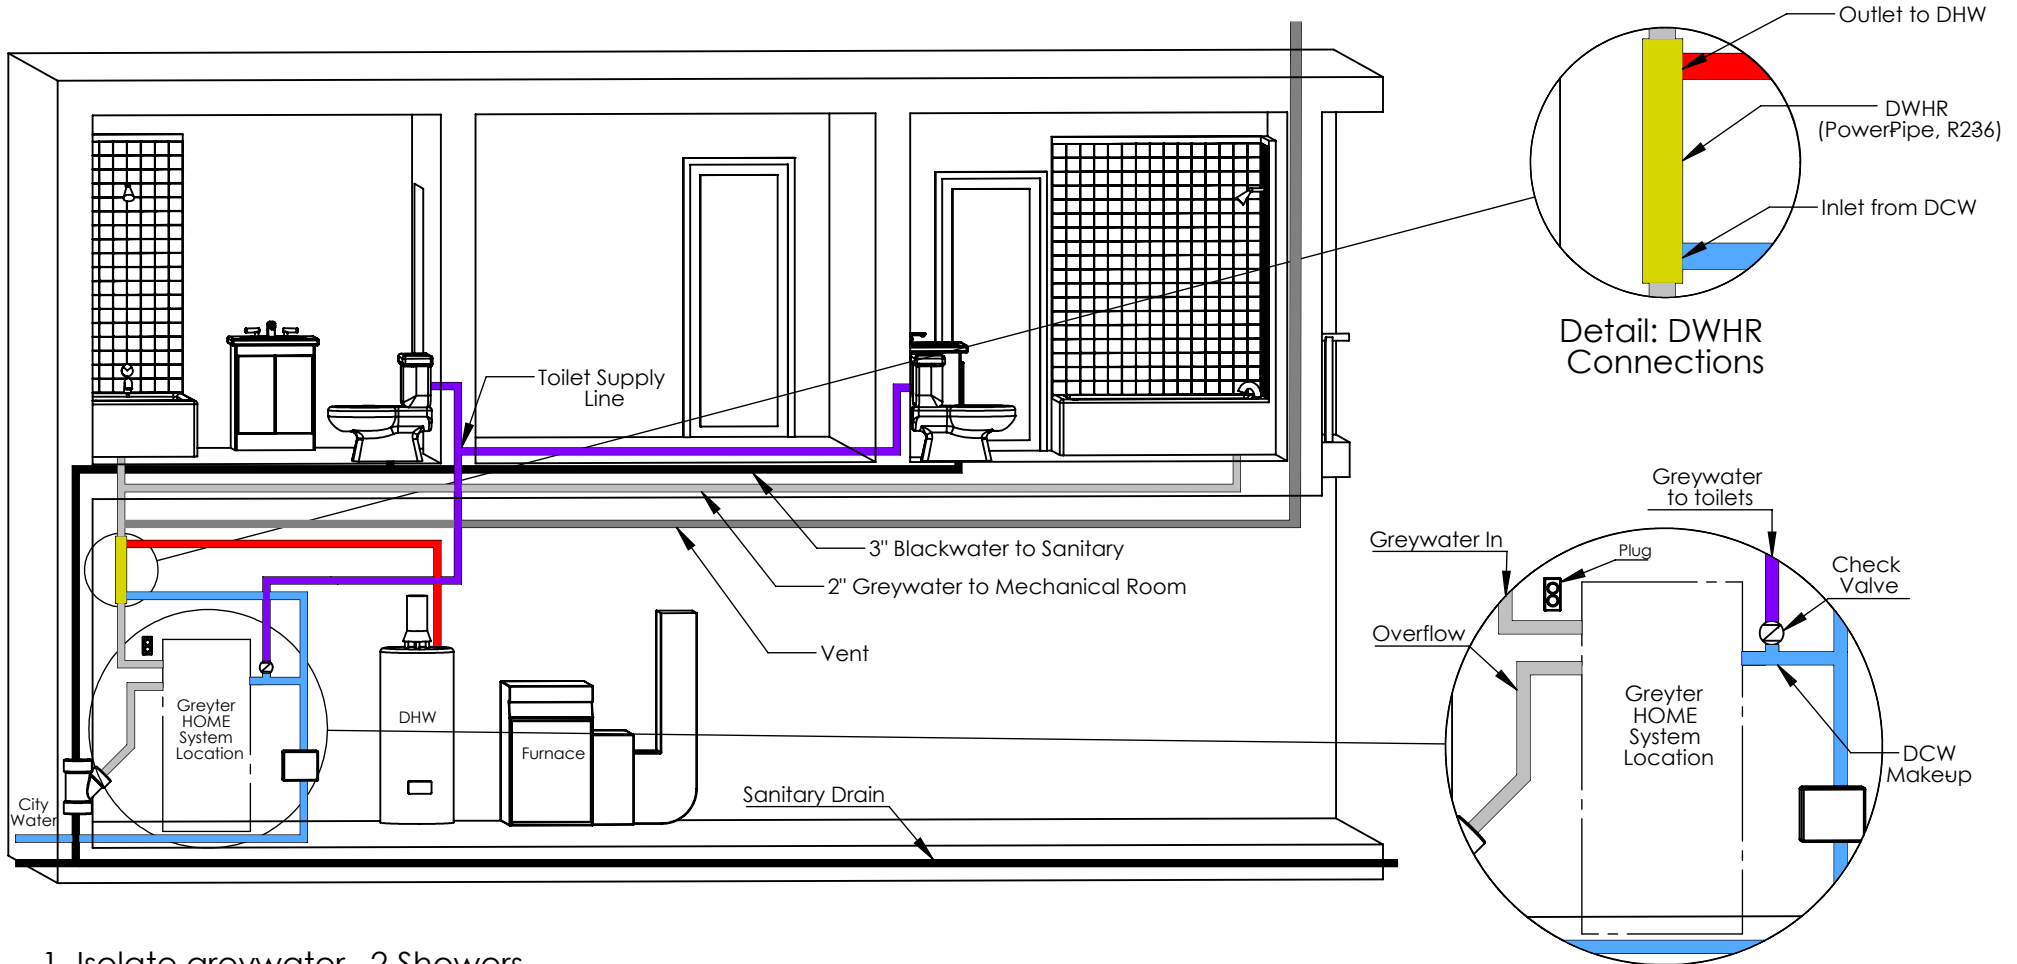

1. Isolate greywater - 2 Showers
2. Homerun greywater to Greyter HOME
3. Isolate supply lines to toilets
4. Vent tied into greywater line
5. Single gang 15Amp, 120V plug located near 2" greywater drain, 48" above finished floor